


FUEL PRO® 483 PRODUCT SPECIFICATIONS

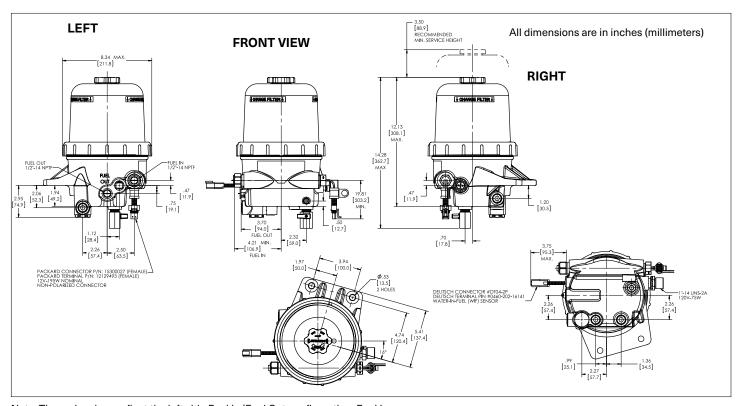

Note: These drawings reflect the left side Fuel In/Fuel Out configuration. Fuel In is also available on the right side.

PRODUCT SPECIFICATIONS			
Height Overall	14.28 in		
Depth Overall	6.58 in		
Width, Max.	8.35 in		
Mount Bracket Centers	3.94 in		
Weight, Dry	10.35 lbs		
Fuel In Connection	1/2"-14 NPTF		
Fuel Out Connection	1/2"-14 NPTF		
Filter Service Clearance Min	3.5 in (88.9 mm)		
Max. Fuel Flow	180 gph		
Electric Pre-heater	12VDC, 195 W, 18 A		
	120VAC, 75 W, .65 A		

FILTRATION PERFORMANCE			
FUEL PRO 483 AT 100 GPH (EST.)			
Micron	Coarse Water Removal (%)	Emulsified Water Removal (%)	Dirt Holding Capacity (grams)
7 mic	100	98.7	157

